

Road Vehicles

Issued June '86
Sheet 5/00

Reproduction Material and Mechanical Artwork

All artwork and copy to be
reproduced or enlarged ONLY
photomechanically.

Section 5

- 5/00 **Road Vehicles**
- 5/01 General notes
- 5/10 Cars, station wagons
- 5/11 Cars, station wagons
- 5/12 Utilities, vans, trucks
- 5/13 Utilities, vans, trucks
- 5/14 Vans, medium to large
- 5/16 Pantechicon units
- 5/17 Road coaches
- 5/18 Typical applications

Road Vehicles

Issued June '86
Sheet 5/01

Reproduction Material and Mechanical Artwork

All artwork and copy to be reproduced or enlarged ONLY photomechanically.

General Notes

Identification of V/Line road vehicles is achieved by the placement of various sized decals, which contain the corporate logo in appropriate colours, onto either both front doors or to the sides of the various road vehicles.

New vehicles added to the current road motor fleet will already have identifying decals applied. However, should a new vehicle be received without appropriate identification or if existing decals are damaged or disfigured in any manner, then initial or replacement decals can be obtained from the Manager, Road Motor Fleet, 14th Level, Transport House.

There are seven different sized decals available and their application to various vehicles are detailed on sheets 5/10 to 5/16.

Should any difficulty be experienced in the placement of decals then the Manager, Road Motor Fleet, is to be contacted for specific instructions.

Logo and colours

The logo replaces the wording Victorian Railways, VicRail, VR, whilst the colours are as per sheet 1/10 — 1/12.


Reproduction Material and Mechanical Artwork
All artwork and copy to be reproduced or enlarged ONLY photomechanically.

Cars, Stationwagons (all colours other than tangerine or red)

A decal measuring 150mm x 75mm, containing the words 'V Line' printed in white with a green slash and on a tangerine background, is to be placed on both front doors of sedans or stationwagon type vehicles.

As variations will occur in the shape and size of door panels of vehicles in the road motor fleet, the following guidelines are issued for the placement of decals.

The decal is to be centered across the smooth or unbroken surface of the front door panel whilst the top edge of the decal is to be placed horizontal with and preferably 100mm below the level of the window sill.

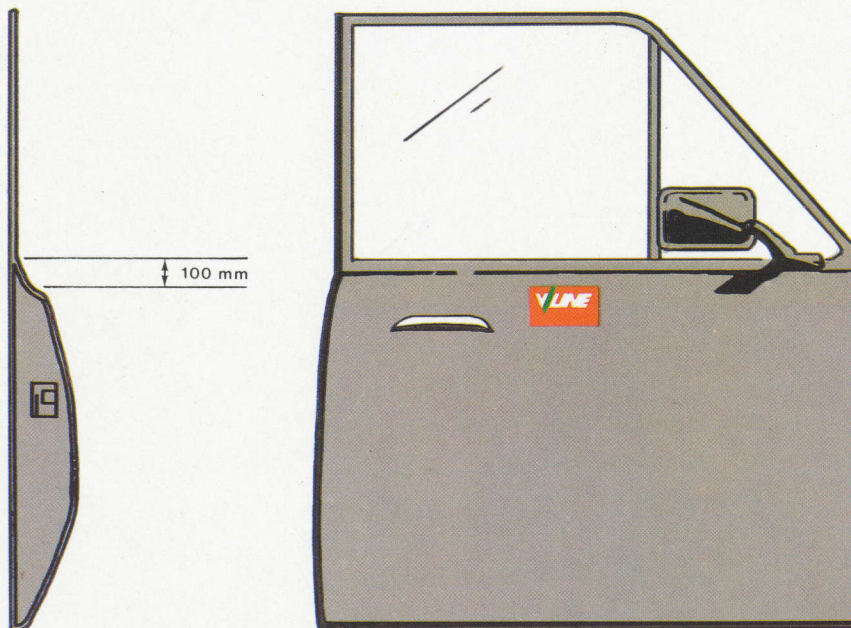

These decals are to be placed on all sedan and station wagon vehicles with the exception of such vehicles coloured tangerine or red. Sheet 5/11 will then be applicable.

Road Vehicles


Issued June '86
Sheet 5/11

**Reproduction Material and
Mechanical Artwork**
All artwork and copy to be
reproduced or enlarged ONLY
photomechanically.

Cars, Stationwagons (coloured tangerine or red)

For such vehicles coloured tangerine or red, 30mm high die-cut letters coloured white with a green slash are to be used. There are to be placed on both front doors of sedans or stationwagon type vehicles.

Guidelines for the placement of these die-cut letters are similar to those shown on sheet 5/10.

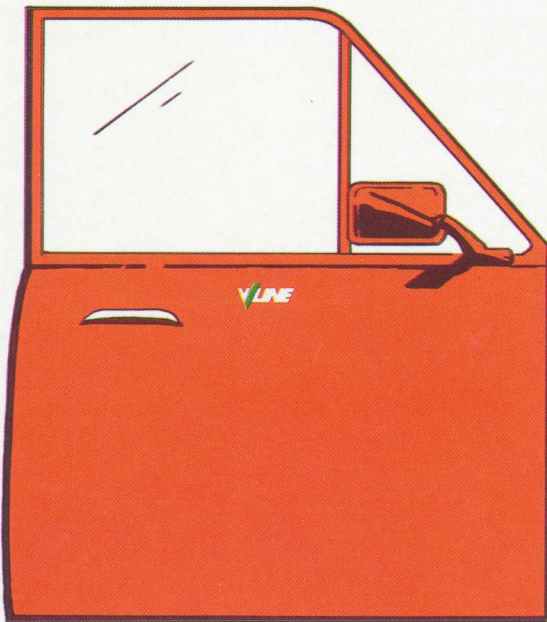

Refer to sheet 5/10 for cars or stationwagons in colours other than above.


Issued June '86
Sheet 5/12

Reproduction Material and Mechanical Artwork
All artwork and copy to be reproduced or enlarged **ONLY** photomechanically.

Utilities, Vans, Trucks (all colours other than tangerine or red)

A decal measuring 350mm x 175mm, containing the words V Line printed in white with a green slash and on a tangerine background, is to be placed on both front doors of utilities, vans or trucks.

Guidelines for the placement of decals are similar to those shown on sheet 5/10.

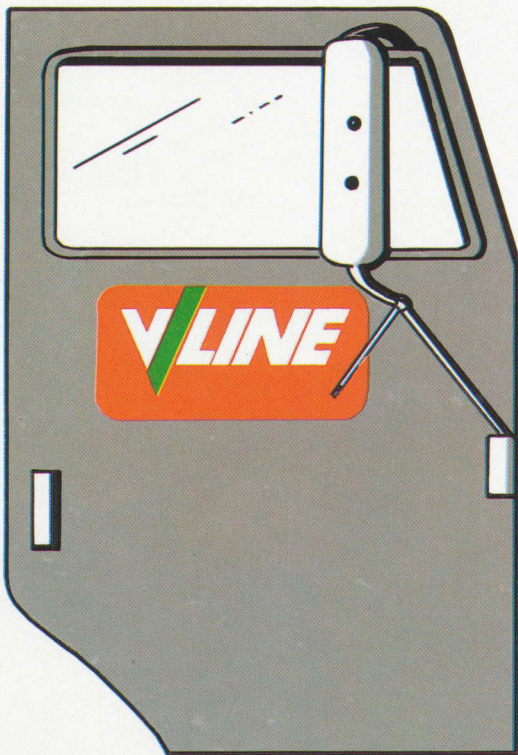

These decals are to be placed on all utilities, vans and trucks **with the exception** of such vehicles coloured tangerine or red. -When this situations arises, then refer to sheet 5/13.

Road Vehicles

Issued June '86
Sheet 5/13


Reproduction Material and Mechanical Artwork

All artwork and copy to be
reproduced or enlarged ONLY
photomechanically.

Utilities, vans and trucks (coloured tangerine or red)

For vehicles in the above colours, 100mm high die-cut letters coloured white with a green slash are to be used. These are to be placed on both front doors of utilities, smaller vans or trucks.

Guidelines for the placement of these die-cut letters are similar to those shown on sheet 5/10.

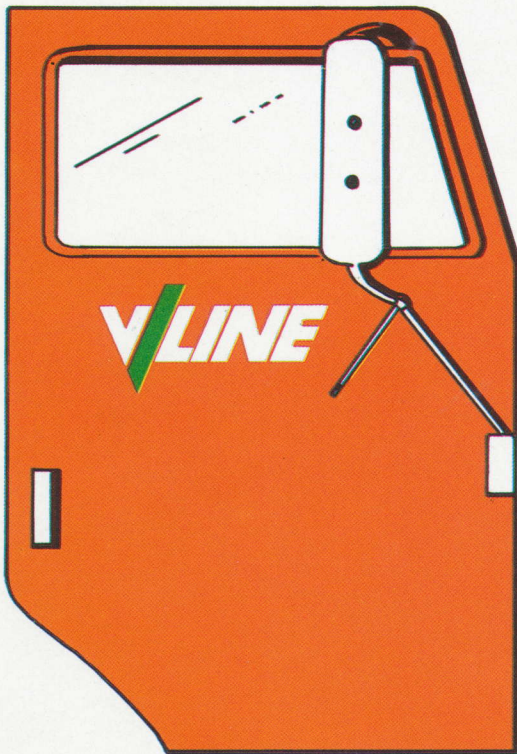

Refer to sheet 5/12 for similar vehicles that are in colours other than tangerine or red.

Road Vehicles

Issued June '86
Sheet 5/14


Reproduction Material and Mechanical Artwork

All artwork and copy to be
reproduced or enlarged ONLY
photomechanically.

Vans — medium to large (coloured tangerine)

The identification of the above vehicles is by the use of 630mm high die-cut letters coloured white with a green slash.

Placement of the logo on the side of the van should commence 900mm from the van front, whilst the slash should be positioned so that the top of the slash is touching the top rail of the van.

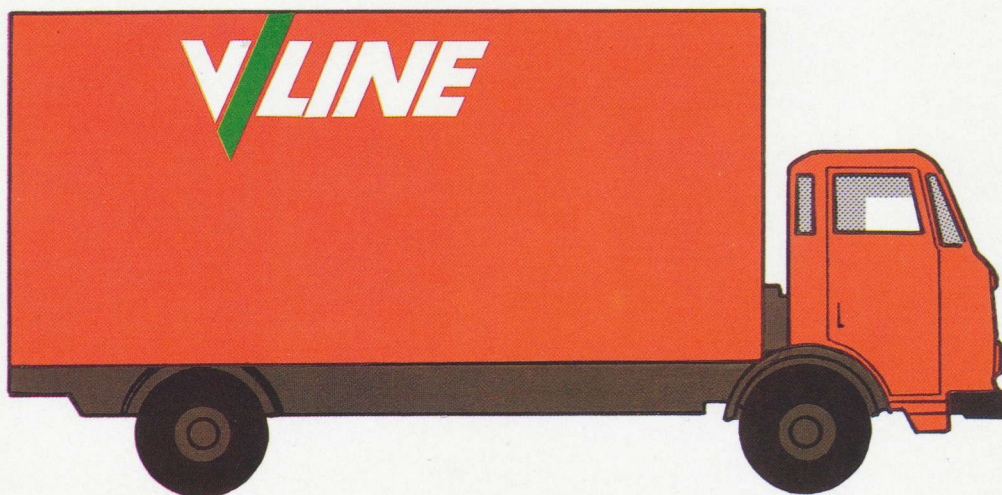

Issued June '86
Sheet 5/16

Reproduction Material and Mechanical Artwork

All artwork and copy to be
reproduced or enlarged ONLY
photomechanically.

Pantechnicon units

These units, of unpainted aluminium, are identified by the use of 630mm high die-cut letters coloured tangerine with a green slash.

Placement of the logo on the side of the pantechnicon unit should commence 900mm from the front of the unit, whilst the slash should be positioned so that the top of the slash is touching the top rail of the unit.



Reproduction Material and Mechanical Artwork

All artwork and copy to be reproduced or enlarged ONLY photomechanically.

Road Coaches

Identification of these vehicles is achieved by painting the body of the coach in tangerine and then applying a logo to the sides and rear of the vehicle, plus white and green stripes around the body of the vehicle.



The actual positioning of the logo and stripes is as follows:

Logo —

This consists of 420mm high die-cut letters coloured white with a green slash. The logo is to be positioned in line with the commencement of the second window (after the door) from the front of the coach. The slash is to be placed so that the top of the slash is touching the window sill or rail immediately below the window.

Stripes —

There are two stripes applied to the body work of the road coach, coloured white and green. Both stripes are 105cm wide with the white stripe positioned above the green stripe. The thickness of the stripe corresponds with the thickness of the letter E (see diagram), the two stripes are lined up with the top two horizontal portions of the letter "E" and are placed horizontally around the road coach with the exception of the front portion of the vehicle.

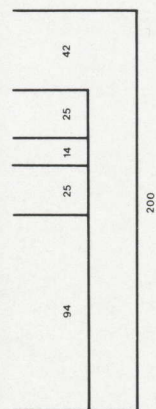

Road Vehicles

Issued June '86
Sheet No. 5/18

Reproduction Material and Mechanical Artwork

All artwork and copy to be
reproduced or enlarged ONLY
photomechanically.

Typical Application

